

[www.acom.web.tr](http://www.acom.web.tr)

**ACOM**

**UNV**

 055-487-44-00

 SALES@ACOM.AZ

 BAKI,NƏRİMANOV, AHMAD RAJABLI 1/25

## UAC-B112-F28(40)-W

56.10 AZN



- **ColorHunter 2MP HD Fixed Mini Bullet Analog Camera, 2.8mm, 1/2.7" CMOS, ICR, 1920x1080:25fps, Ultra 265, H.265, H.264, MJPEG, double streams, DC 12V&PoE, Fixed lens(2.8mm,4mm), IR range: up to 20m, 3-Axis**

## UAC-T112-F28(40)-W

52.36AZN



- **2MP HD Fixed Mini Turret Analog Camera, 2.8mm, 1/2.7" CMOS, ICR, 1920x1080:25fps, Ultra 265, H.265, H.264, MJPEG, double streams, DC 12V&PoE, Fixed lens(2.8mm,4mm), IR range: up to 20m, 3-Axis**

## UAC-B112-F28(40)

39.10 AZN



- **2MP HD Fixed IR Mini Bullet Analog Camera**
- **2.8mm/4mm, 1/2.7" CMOS, ICR, 1920x1080:25fps, Ultra 265, H.265, H.264, MJPEG, double streams, DC 12V&PoE, Fixed lens(2.8mm,4mm), IR range: up to 20m, 3-Axis**

## UAC-T112-F28(40)

37.40 AZN



- **2MP HD Fixed IR Turret Analog Camera 2.8mm, 4mm 1/2.7" CMOS, ICR, 1920x1080:25fps, Ultra265, H.265, H.264, MJPEG, double streams, DC 12V&PoE, Fixed lens(2.8mm,4mm), IR range: up to 20m, 3-Axis**

# HYBRID DVR (EASY)

## XVR301-04G3

117.3 AZN



- 4ch 5MP Lite/4MP Lite/1080P/720P/CIF Support H.265/H.264 video formats
- Support audio over coaxial cable(only for TVI cameras)
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4-channel BNC input 1 sataUp to 8TB for each HDD
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080

## XVR301-08G3

149.6 AZN



- 8ch 5MP Lite/4MP Lite/1080P/720P/CIF Support H.265/H.264 video formats
- Support audio over coaxial cable(only for TVI cameras)
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4-channel BNC input 1 sataUp to 8TB for each HDD
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080

## XVR301-16G3

248.2 AZN



- 16ch 5MP Lite/4MP Lite/1080P/720P/CIF Support H.265/H.264 video formats
- Support audio over coaxial cable(only for TVI cameras)
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4-channel BNC input 1 sataUp to 8TB for each HDD
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080

## XVR301-04Q3

161.50 AZN



- 4ch 8MP Lite/5MP/5MP Lite/4MP Lite/1080P/720P/CIF Support H.265/H.264 video formats
- Support audio over coaxial cable(only for TVI cameras)
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4-channel BNC input 1 sataUp to 8TB for each HDD
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080

# HYBRID DVR (EASY)

**XVR301-08Q3**

221 AZN



- 8ch 8MP Lite/5MP/5MP Lite/4MP Lite/1080P/720P/CIF Support H.265/H.264 video formats
- Support audio over coaxial cable(only for TVI cameras)
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4-channel BNC input 1 sataUp to 8TB for each HDD
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080

## NVR301-04S3 4K

160.65 AZN



- Support Ultra 265/H.265/H.264 video formats
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 4-ch 1 SATA HDD up to 8TB
- 64Mbps 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF

## NVR301-08S3 4K

180.20AZN



- Support Ultra 265/H.265/H.264 video formats
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 8ch 1 SATA HDD up to 8TB
- 64Mbps 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF

## NVR301-16S3 4K

272AZN



- Support Ultra 265/H.265/H.264 video formats
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 16ch 1 SATA HDD up to 8TB
- 64Mbps 4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF

## NVR301-04LS3-P4 POE IN

253.30AZN



- Support Ultra 265/H.265/H.264 video formats
- 4-channel input poe in 4 RJ45 10M/100M self-adaptive Ethernet Interface
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 1 SATA HDD up to 6 TB

## NVR301-04LS2-P4

146.20AZN



- 4-ch 1-SATA Ultra 265/H.265/H.264 NVR
- Support Ultra 265/H.265/H.264 video formats
- 4-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 6MP resolution recording
- 1 SATA HDD up to 6 TB
- Support cloud upgrade

## NVR301-08LS2

166.60AZN



- 8-ch 1-SATA Ultra 265/H.265/H.264 NVR
- Support Ultra 265/H.265/H.264 video formats
- 8-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 6MP resolution recording
- 1 SATA HDD up to 6 TB
- Support cloud upgrade

## NVR301-08LS3-P8 POE IN

357AZN



- Support Ultra 265/H.265/H.264 video formats
- 8-channel input poe in 4 RJ45 10M/100M self-adaptive Ethernet Interface
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 1 SATA HDD up to 6 TB

## NVR301-16LS3-P8 POE IN

411.40AZN



- Support Ultra 265/H.265/H.264 video formats
- 16-channel input
- Plug & Play with 8 independent PoE network interfaces
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 1 SATA HDD up to 6TB

## NVR302-09S 4K

297.50AZN



- Support Ultra265/H.265/H.264 video formats
- 9-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
- 2 SATA HDDs, up to 8TB for each HDD

## NVR302-16S 4K

331.50AZN



- Support Ultra265/H.265/H.264 video formats
- 16-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
- 2 SATA HDDs, up to 8TB for each HDD

## NVR302-32S 4K

469.20AZN



- Support Ultra265/H.265/H.264 video formats
- 32-channel input
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- Accurate retrieval, instant playback
- 2 SATA HDDs, up to 8TB for each HDD

## NVR302-32E2 UP TO 12MP


559.50AZN



- Support Ultra H.265/H.265/H.264 video formats
- 32-channel input
- Supports mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA. HDMI up to 4K (3840x2160) resolution
- HDMI and VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- 2 SATA HDDs, Up to 8TB for each HDD
- Various fisheye dewarping modes for live view and playback for both web interface and GUI
- ANR technology to enhance the storage reliability when the network is disconnected

## NVR304-16S 4K

538.90AZN



- Support Ultra265/H.265/H.264 video formats
- 16/32-channel input
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- Accurate retrieval, instant playback
- 4 SATA HDDs, up to 8TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected

## NVR304-32S 4K

714AZN



- Support Ultra265/H.265/H.264 video formats
- 16/32-channel input
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- Accurate retrieval, instant playback
- 4 SATA HDDs, up to 8TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected



## NVR302-16S2 4K

428.40AZN



- Support Ultra265/H.265/H.264 video formats
- 9/16-channel input
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 2 SATA HDDs, up to 8TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

## NVR304-16X UP TO 12MP

SORĞU  
ƏSASINDA



- Support Ultra 265/H.265/H.264 video formats
- 16/-channel input
- Supports mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 2-ch HDMI, 1-ch VGA. HDMI1 and HDMI2 up to 4K (3840x2160) resolution
- HDMI1, HDMI2, VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- Support RAID 1, 5
- 4 SATA HDDs, Up to 10TB for each HDD
- Various fisheye dewarping modes for live view and playback for both web interface and GUI

## NVR302-32E2 UP TO 12MP

SORĞU  
ƏSASINDA



- Support Ultra 265/H.265/H.264 video formats
- 16/-channel input
- Supports mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 2-ch HDMI, 1-ch VGA. HDMI1 and HDMI2 up to 4K (3840x2160) resolution
- HDMI1, HDMI2, VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- Support RAID 1, 5
- 4 SATA HDDs, Up to 10TB for each HDD
- Various fisheye dewarping modes for live view and playback for both web interface and GUI

## NVR308-32X

SORĞU  
ƏSASINDA



- Support Ultra H.265/H.265/H.264 video formats
- 32-channel input
- Supports mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 2-ch HDMI, 1-ch VGA. HDMI1 and HDMI2 up to 4K (3840x2160) resolution
- HDMI1, HDMI2, VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- Support RAID 0, 1, 5, 6, 10
- 8 SATA HDDs, Up to 10TB for each HDD
- Support N+1 Hot spare
- Support for 12V Power output

## NVR308-64X

SORĞU  
ƏSASINDA



- Support Ultra H.265/H.265/H.264 video formats
- 64-channel input
- Supports mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 2-ch HDMI, 1-ch VGA. HDMI1 and HDMI2 up to 4K (3840x2160) resolution
- HDMI1, HDMI2, VGA independent outputs provided
- Up to 12 Megapixels resolution recording
- Support RAID 0, 1, 5, 6, 10
- 8 SATA HDDs, Up to 10TB for each HDD
- Various fisheye dewarping modes for live view and playback for both web interface and GUI
- Support N+1 Hot spare

## NVR516-128



- 128-ch, 16 SATA interface, 3U, H.265&4K, 4 Network interface, 2 SFP interface, RAID0/1/5/10/50/60, Hard disk hot swap on front panel, Redundant power supply (optional), Up to 14 HDMI output (optional), 2 miniSAS ports

# IP KAMERA 2MP (EASY)

## SMART PT CAMERA UHO-S2E

85AZN



- 2MP, IR night vision
- 360° endless pan range, 24-hour guard
- Two-way audio
- Multiple detection ways SD card storage Up to 256 GB
- Easy and convenient to use

## IPC2122LB-SF28-A

99.96AZN



- 2MP (1920\*1080)@30/25fps;
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67 protection
- Support PoE power supply
- 3-Ax

## IPC3612LB-SBF28-A

99.96AZN



- High quality image with 2MP, 1/2.8"CMOS sensor
- 2MP (1920\*1080)@30/25fps;
- Ultra 265, H.265, H.264
- Smart IR, up to 30m (98ft) IR distance
- Day/night functionality
- 2D/3D DNR (Digital Noise Reduction)
- IP67 protection
- Support PoE power supply
- 3-Axis

## IPC2122LB-ADF28(40)KM-G DAXILI MIKRAFON

134.30AZN



- High quality image with 2MP, 1/2.7"CMOS sensor
- 2MP (1920\*1080)@30/25fps; 2,8mm-4mm
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 30m (98ft) IR distance
- Supports 128 G Micro SD card
- Support PoE power supply
- 3-Axis

# IP KAMERA 2MP (EASY)

IPC322LB-DSF28(40)K-G

144.50AZN

DAXİLİ MİKRAFON



- High quality image with 2MP, 1/2.7"CMOS sensor
- 2MP (1920\*1080)@30/25fps; 2,8mm 4mm
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Smart IR, up to 30m (98ft) IR distance
- Supports 128 G Micro SD card
- IK10 vandal resistant
- IP67 protection
- Support PoE power supply
- 3-Axis

IPC3612LB-ADF28(40)K-G  
DAXİLİ MİKRAFON

144.50AZN



- High quality image with 2MP, 1/2.7"CMOS sensor
- 2MP (1920\*1080)@30/25fps; 720P (1280\*720)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Smart IR, up to 30m (98ft) IR distance
- Built-in Mic
- Supports 128 G Micro SD card
- IP67 protection
- Support PoE power supply
- 3-Axis

IPC2122LE-ADF28(40)KMC-WL

180.20AZN



- 2MP HD ColorHunter Mini IR Fixed Bullet Network Camera
- High quality image with 2MP, 1/2.8"CMOS sensor
- 2MP (1920\*1080) @30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft) IR distance
- White Light, up to 30m (98ft) white light distance
- Supports 128 G Micro SD card
- IP67 protection
- Support PoE power supply
- 3-Axis

IPC3612LE-ADF28(40)KC-WL

171.70AZN



- 2MP HD ColorHunter IR Fixed Eyeball Network Camera
- High quality image with 2MP, 1/2.8"CMOS sensor
- 2MP (1920\*1080) @30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft) IR distance
- White Light, up to 30m (98ft) white light distance
- Supports 128 G Micro SD card
- IP67 protection
- Support PoE power supply
- 3-Axis

# IP KAMERA 2MP (EASY)

323AZN

## IPC2322LB-ADZK-G



- 2MP HD IR VF Bullet Network Camera 2.8 ~ 12mm, AF automatic focusing and motorized zoom lens
- High quality image with 2MP, 1/2.7"CMOS sensor
- 2MP (1920\*1080)@30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 50m (164ft) IR distance
- Supports 128 G Micro SD card
- IP67 protection
- Support PoE power supply
- 3-Axis

## IPC3632LB-ADZK-G

268.60AZN



- 2MP HD IR VF Eyeball Network Camera 2.8 ~ 12mm, AF automatic focusing and motorized zoom lens
- High quality image with 2MP, 1/2.7"CMOS sensor
- 2MP (1920\*1080)@30/25fps; 720P (1280\*720)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 40m (131ft) IR distance
- Supports 128 G Micro SD card
- IP67 protection
- Support PoE power supply
- 3-Axis

## C1L-2WN-G

170AZN



- Smart Wireless Cube Camera
- Day/night functionality
- Smart IR , up to 10 m (32 ft) IR distance
- Built-in Mic/Speaker
- Wi-Fi
- Micro SD, up to 128GB

# IP KAMERA 2MP (PRIME)

306AZN

## IPC2312SB-ADF40(60)KM-IO



- 2MP HD Intelligent 80m IR Fixed Bullet Network Camera
- High quality imaging with 2MP, 1/2.8" CMOS sensor
- 2MP (1920\*1080)@30/25fps; 720P (1280\*720)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
- 120dB true WDR technology enables clear imaging in strong light scene
- Support 9:16 Corridor Mode
- Built-in 2 Mic
- Smart IR, up to 80m (262 ft) IR distance
- Supports 256 G Micro SD card
- IP67 protection

## IPC2322SB-DZK-IO

535.50AZN



- 2MP HD Intelligent LightHunter IR VF Bullet Network Camera
- High quality image with 2MP, 1/2.8" CMOS sensor
- 2MP (1920\*1080)@30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Alarm: 1 in/1 out, Audio: 1 in/1 out
- Smart IR, up to 50m (164ft) IR distance
- Supports 256 G Micro SD card
- IK10 vandal resistant
- IP67 protection

## IPC2322SB-HDZK-IO

620.50AZN



- High quality image with 2MP, 1/2.8" CMOS sensor
- 1920\*1080@60fps in the main stream, deliver detailed live while 60fps making it smooth and closer to the real image
- Ultra 265, H.265, H.264, MJPEG
- 5X optical zoom allows for closer viewing of subjects
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- Lighthunter product technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- DC12V or PoE (IEEE 802.3af) power supply
- Wide voltage range of  $\pm 25\%$  in DC
- Audio 1 in and 1 out, Alarm 1 in and 1 out

## IPC2122SB-ADF28KM-IO

289AZN



- 2MP HD Intelligent LightHunter IR Fixed Bullet Network Camera
- High quality imaging with 2MP, 1/2.8" CMOS sensor
- 2MP (1920\*1080)@30/25fps; 720P (1280\*720)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
- 120dB true WDR technology enables clear imaging in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 40m (131ft) IR distance
- Supports 256 G Micro SD card
- IP67 protection
- Support PoE power supply

# IP KAMERA 2MP (PRİME)

IPC322SB-DF28(40)K-10

LIGHTHUNTER

HƏRƏKƏTİN AŞKARLANMASI, ƏRAZİYƏ MÜDAXİLƏ  
VƏ XƏTTİN KƏSİŞMƏSİ

234.60AZN



- High quality imaging with 2MP, 1/2.8" CMOS sensor
- 2MP (1920\*1080)@30/25fps; 720P (1280\*720)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Alarm: 1 in/1 out, Audio: 1 in/1 out
- Smart IR, up to 30m (98ft) IR distance
- Supports 256 G Micro SD card
- IK10 vandal resistant
- IP67 protection
- Support PoE power supply

IPC3632SB-ADZK-10  
İNSAN AXINININ HESABLANMASI VƏ  
İZDİHAMIN SİXLİĞİNİN MONİTORİNQİ

501.50AZN



- 2MP HD Intelligent LightHunter IR VF Eyeball Network Camera
- High quality image with 2MP, 1/2.8" CMOS sensor
- 2MP (1920\*1080)@30/25fps; 720P (1280\*720)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 40m (131ft) IR distance
- Supports 256 G Micro SD card
- IK10 vandal resistant and IP67 protection
- Support PoE power supply



# IP KAMERA 4MP (EASY)

IPC2124LB-SF28KM-G

155.38AZN



- 4MP Mini Fixed Bullet Network Camera
- High quality image with 4MP, 1/3"CMOS sensor
- 4MP (2560\*1440)@25/20fps; 3MP (2304\*1296)@30/25fps; 2MP (1920\*1080)@30/25fps; 720P (1280\*720)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- Smart IR, up to 30m (98ft) IR distance
- Supports 128 G Micro SD card
- Support PoE power supply
- 3-Axis

IPC3614LB-SF28K-G

155.38AZN



- 4MP Fixed Dome Network Camera
- High quality image with 4MP, 1/3"CMOS sensor
- 4MP (2560\*1440)@25/20fps; 3MP (2304\*1296)@30/25fps; 2MP (1920\*1080)@30/25fps; 720P (1280\*720)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- Smart IR, up to 30m (98ft) IR distance
- Supports 128 G Micro SD card
- Support PoE power supply
- 3-Axis

IPC2124LE-ADF28KMC-WL

213.35AZN



- 4MP HD ColorHunter Mini IR Fixed Bullet Network Camera
- High quality image with 4MP, 1/3"CMOS sensor
- 4MP (2688\*1520)@25/20fps; 4MP (2560\*1440)@30/25fps; 3MP (2304\*1296)@30/25fps; 2MP (1920\*1080)@30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft) IR distance
- White Light, up to 30m (98ft) white light distance
- Supports 128 G Micro SD card
- IP67 protection
- Support PoE power supply
- 3-Axis

IPC324LB-SF28(40)K-G

164.90AZN



- High quality image with 4MP, 1/3"CMOS sensor
- 4MP (2560\*1440)@25/20fps; 3MP (2304\*1296)@30/25fps; 2MP (1920\*1080)@30/25fps; 720P (1280\*720)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- Smart IR, up to 30m (98ft) IR distance
- Supports 128 G Micro SD card
- Support PoE power supply
- 3-Axis

# IP KAMERA 4MP (EASY)

IPC3614LE-ADF28KC-WL  
COLORHUNTER (GECƏ GÖRÜNTÜSÜ 30M)

164.90AZN



- 4MP HD ColorHunter IR Fixed Eyeball Network Camera
- High quality image with 2MP, 1/2.8"CMOS sensor
- 2MP (1920\*1080) @30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic & Speaker
- Smart IR, up to 30m (98ft) IR distance
- White Light, up to 30m (98ft) white light distance
- Supports 128 G Micro SD card
- IP67 protection
- 3-Axis

IPC2124LR5-DUPF28M-F  
GECƏ GÖRÜNTÜSÜ 50M 2,8MM 4MM 6MM

215.05AZN



- 4MP EasyStar Mini Fixed Bullet Network Camera Day/night functionality
- Smart IR, up to 50m (164ft) IR distance
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 2D/3D DNR (Digital Noise Reduction)

IPC2324LB-ADZK-G  
MOTORIZED ZOOM

333.20AZN



- 4MP HD IR Bullet Network Camera
- High quality image with 4MP, 1/3"CMOS sensor 2.8 ~ 12mm, AF automatic focusing and motorized zoom lens
- 4MP (2688\*1520)@ 25/20fps; 4MP (2560\*1440)@ 25/20fps; 3MP (2304\*1296)@ 30/25fps; 2MP (1920\*1080)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 50m (164ft) IR distance
- Supports 256 G Micro SD card
- IP67 protection
- Support PoE power supply
- 3-Axis

IPC3634LB-ADZK-G  
MOTORIZED ZOOM

292.40AZN



- 4MP HD IR VF Eyeball Network Camera 2.8 ~ 12mm, AF automatic focusing and motorized zoom lens
- High quality image with 4MP, 1/3"CMOS sensor
- 4MP (2688\*1520)@ 25/20fps; 4MP (2560\*1440)@ 25/20fps; 3MP (2304\*1296)@ 30/25fps; 2MP (1920\*1080)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 40m (131ft) IR distance
- Supports 256 G Micro SD card
- IP67 protection
- Support PoE power supply
- 3-Axis

# IP KAMERA 4MP (PRIME)

IPC2124SS-ADF28(40)KM-I0  
HƏRƏKƏTİN AŞKARLANMASI, ƏRAZİYƏ MÜDAXİLƏ  
VƏ XƏTTİN KƏSİŞMƏSİ

312.80AZN



- 4MP SD Card Mini Fixed Bullet Network Camera
- High quality image with 4MP, 1/3"CMOS sensor
- 4MP (2688\*1520)@30/25fps; 4MP (2560\*1440)@30/25fps; 3MP (2304\*1296)@30/25fps; 2MP (1920\*1080)@30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 40m (131ft) IR distance
- Support 256 G Micro SD card
- IP67 protection
- Support PoE power supply

IPC3614SS-ADF28(40)KM-I0  
HƏRƏKƏTİN AŞKARLANMASI, ƏRAZİYƏ  
MÜDAXİLƏ VƏ XƏTTİN KƏSİŞMƏSİ

277.10AZN



- 4MP LightHunter Deep Learning Dome Network Camera
- 1/2.7", Powered by lighthunter
- Smart IR, up to 40m (131 ft) IR distance
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- People Counting, support people flow counting and crowd density monitoring, suitable for different statistical scenarios
- Ultra 265, H.265, H.264, MJPEG
- Triple streams
- 2688\*1520@30fps in the main stream

IPC2314SB-ADF40KM-I0 (4MM 6MM)

351.90AZN



- 4MP HD Intelligent 80m IR Fixed Bullet Network Camera
- High quality image with 4MP, 1/2.7"CMOS sensor
- 4MP (2688\*1520)@30/25fps; 4MP (2560\*1440)@30/25fps; 3MP (2304\*1296)@30/25fps; 2MP (1920\*1080)@30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in 2 Mic
- Smart IR, up to 80m (262 ft) IR distance
- Supports 256 G Micro SD card
- IP67 protection

IPC3534SB-ADNZK-I0

491.30AZN



- 4MP HD Intelligent LightHunter Cable-free IR VF Dome Network Camera
- High quality image with 4MP, 1/2.7"CMOS sensor
- 4MP (2688\*1520)@30/25fps; 4MP (2560\*1440)@30/25fps; 3MP (2304\*1296)@30/25fps; 2MP (1920\*1080)@30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic
- Smart IR, up to 30m (98 ft) IR distance
- Supports 256 G Micro SD card
- Cable-free
- Support PoE power supply

# IP KAMERA 4MP (PRIME)

IPC2124SB-ADF28(40)KMC-10 (4MP TRI-GURAD)  
SƏS VƏ İŞIĞ SİQNALI  
HƏRƏKƏTİN AŞKARLANMASI, ƏRAZİYƏ MÜDAXİLƏ  
VƏ XƏTTİN KƏSİŞMƏSİ

491.30AZN



- 4MP HD Intelligent Light and Audible Warning Fixed Bullet Network Camera 2,8mm 4mm
- High quality image with 4MP, 1/2.7" CMOS sensor
- 4MP (2688\*1520)@ 30/25fps; 4MP (2560\*1440)@ 30/25fps; 3MP (2304\*1296) @30/25fps; 2MP (1920\*1080) @30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic and Speaker
- Smart IR, up to 30m (98ft) IR distance
- Supports 256 G Micro SD card
- IP67 protection
- Support PoE power supply

IPC3614SB-ADF28(40)KMC-10(4MP TRI-GURAD)  
SƏS VƏ İŞIĞ SİQNALI  
HƏRƏKƏTİN AŞKARLANMASI, ƏRAZİYƏ MÜDAXİLƏ  
VƏ XƏTTİN KƏSİŞMƏSİ

394.40AZN



- 4MP HD Intelligent Light and Audible Warning Fixed Eyeball Network Camera
- High quality image with 4MP, 1/2.7" CMOS sensor
- 4MP (2688\*1520)@ 30/25fps; 4MP (2560\*1440)@ 30/25fps; 3MP (2304\*1296) @30/25fps; 2MP (1920\*1080) @30/25fps;
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, include cross line, intrusion, enter area, leave area detection
- 120dB true WDR technology enables clear image in strong light scene
- Support 9:16 Corridor Mode
- Built-in Mic and Speaker
- Smart IR, up to 30m (98ft) IR distance
- Supports 256 G Micro SD card
- IP67 protection
- Support PoE power supply

IPC542SE-HDK-10

394.40AZN



- 2MP LightHunter WDR Network Box Camera
- High quality image with 2MP, 1/2.8" CMOS sensor
- 1920\*1080@60fps in the main stream
- Ultra 265, H.265, H.264, MJPEG
- Triple streams
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- People Counting, support people flow counting and crowd density monitoring, suitable for different statistical scenarios
- LightHunter technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- DC12V or AC24V or PoE (IEEE 802.3af) power supply
- Wide voltage range of  $\pm 25\%$
- Audio 1 in and 1 out, Alarm 2 in and 1 out

# PTZ IP CAMERA

IPC6412LR-X5UPW-VG

510AZN



- 2MP WDR Starlight IR Network Indoor MiniPTZ Dome Camera
- High quality image with 2MP, 1/2.7" CMOS sensor
- 1920\*1080@30fps in the main stream
- Ultra 265, H.265, H.264, MJPEG
- 5X optical zoom allows for closer viewing of subjects
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- LightHunter technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- Wi-Fi connection and easy installation
- Built-in Mic & Speaker, support two-way audio
- Alarm 1 in and 1 out
- Smart IR, up to 30m (98 ft) IR distance

IPC6312LFW-AX4C-VG

510AZN



- 2MP LightHunter Active Deterrence PTZ Camera
- High quality image with 2MP, 1/2.7" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- People Counting, support people flow counting and crowd density monitoring, suitable for different statistical scenarios
- LightHunter technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- Built-in Mic & Speaker
- Smart IR, Up to 50 m (164 ft) IR distance and 10m (33 ft) warm light distance
- Micro SD, up to 256GB
- IP66 protection
- DC12V or PoE (IEEE 802.3af) power supply

IPC9312LFW-AF28-2X4

649.40AZN



- 2\*2MP Lighthunter Dual-lens Network PTZ camera
- Fixed camera and PTZ camera integration, dual channels with one IP, look at overall situation and consider details at the same time
- High quality image with 2MP, 1/2.8" CMOS sensor
- 1920\*1080@25fps in the main stream
- Ultra 265, H.265, H.264, MJPEG
- 4X optical zoom of PTZ channel allows for closer viewing of subjects
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- PTZ channel can be linked by fixed channel' smart intrusion prevention to track the objects triggering the rule
- Lighthunter technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- DC12V or PoE+(IEEE 802.3at) power supply

IPC94144SR-X25-F40C  
SMART INTRUSION  
INSANLARIN SAYILMASI, INSANLARIN  
AXINININ HESABLANMASI VƏ İZDIHAM  
SIXLIGININ MONITORINQINƏ DƏSTƏK

1434.80AZN



- Fixed camera and PTZ camera integration, dual channels with one IP, look at overall situation and consider details at the same time
- High quality image with 4MP, 1/2.7" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- 25X optical zoom of PTZ channel allows for closer viewing of subjects
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- People Counting, support people flow counting and crowd density monitoring, suitable for different statistical scenarios
- PTZ channel can be linked to fixed channel's smart intrusion prevention to track the objects triggering the rule
- Support sound and light warning, makes warning and alarming more noticeable
- Lighthunter technology ensures ultra-high image quality in low illumination environment
- DC12V or PoE+(IEEE 802.3at) power supply
- Alarm 2 in and 1 out, Audio 1 in and 1 out

# PTZ IP CAMERA

IPC94144SFW-X25-F40C

SMART INTRUSION

İNSANLARIN SAYILMASI, İNSANLARIN AXINININ

HESABLANMASI VƏ İZDİHAM SIXLIĞININ

MONİTORİNGİNƏ DƏSTƏK

1518.10AZN



- Fixed camera and PTZ camera integration, dual channels with one IP, look at overall situation and consider details at the same time
- Ultra 265, H.265, H.264, MJPEG
- 25X optical zoom of PTZ channel allows for closer viewing of subjects
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- People Counting, support people flow counting and crowd density monitoring, suitable for different statistical scenarios
- IR & warm light illumination to deal with different scenes and achieve full-color illumination
- DC12V or PoE+(IEEE 802.3at) power supply
- Alarm 2 in and 1 out, Audio 1 in and 1 out

IPC6612SR-X25-VG

1249.50AZN



- 2MP 25x Lighthunter Network PTZ Dome Camera
- High quality image with 2MP, 1/2.8" CMOS sensor
- 1920\*1080@30fps in the main stream
- Ultra 265, H.265, H.264, MJPEG
- 25X optical zoom allows for closer viewing of subjects
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- LightHunter technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- DC12V or PoE+(IEEE 802.3at) power supply
- Audio 1 in and 1 out, Alarm 2 in and 1 out
- Micro SD, up to 256GB
- Smart IR, up to 150m (492 ft) IR distance
- IP66 ingress protection

IPC6612SR-X33-VG

1751AZN



- 2MP 33x Lighthunter Network PTZ Dome Camera
- High quality image with 2MP, 1/2.8" CMOS sensor
- 1920\*1080@30fps in the main stream
- Ultra 265, H.265, H.264, MJPEG
- 33X optical zoom allows for closer viewing of subjects
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- LightHunter technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- DC12V or PoE+(IEEE 802.3at) power supply
- Audio 1 in and 1 out, Alarm 2 in and 1 out
- Micro SD, up to 256GB
- Smart IR, up to 150m (492 ft) IR distance
- IP66 ingress protection

IPC6424SR-X25-VF

1190AZN



- 4MP 25x Lighthunter Network PTZ Dome Camera
- High quality image with 4MP, 1/2.8" CMOS sensor
- 2688\*1520@30fps in the main stream
- Ultra 265, H.265, H.264, MJPEG
- Triple streams
- 25X Optical Zoom
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- People Counting, support people flow counting and crowd density monitoring, suitable for different statistical scenarios
- Smart IR, up to 100m (328ft) IR distance
- DC 12V±25% or PoE+ (IEEE 802.3at)
- Alarm 2 in and 1 out, Audio 1 in and 1 out
- IP67 ingress protection
- IK10 vandal resistant

# PTZ IP CAMERA

IPC675LFW-AX4DUPKC-VG

527AZN



- 5MP LightHunter Active Deterrence Mini PTZ Camera
- High quality image with 5MP, 1/2.7" CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- People Counting, support people flow counting and crowd density monitoring, suitable for different statistical scenarios
- LightHunter technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- Built-in Mic & Speaker
- Smart IR, Up to 50 m (164 ft) IR distance and 10m (33 ft) warm light distance
- Micro SD, up to 256GB
- IP66 protection
- DC12V or PoE (IEEE 802.3af) power supply

IPC7622ER-X44-VF

SORĞU  
ƏSASINDA



- 2MP 44X Lighthunter Intelligent Network Positioning system
- High quality image with 2MP, 1/2.8" CMOS sensor
- 1920\*1080@60fps in the main stream
- Triple streams
- 44X Optical Zoom
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- People Counting, support people flow counting and crowd density monitoring, suitable for different statistical scenarios
- Support Optical defog, Self-adaptive defog
- Lighthunter technology ensures ultra-high image quality in low illumination environment
- Smart IR, up to 400m (1312ft) IR distance
- Rain-sensing auto wiper
- Power supply: DC  $\pm 48V \pm 25\%$ , DC 24V  $\pm 15\%$  (DC20V~DC60V), AC 24V  $\pm 25\%$
- Alarm 7 in and 2 out, Audio 1 in and 1 out
- IP67 ingress protection

TIC7632EL-F75-2X55G  
THERMAL

SORĞU  
ƏSASINDA



- 2MP Thermal & Optical Dual-spectrum Starlight Intelligent Positioning Thermal & Optical dual-spectrum image, dual video with single IP address, adaptable to more various scenes
- Passive infrared thermal imaging, meet the requirement of concealed monitoring and not affected by bad weather condition such as fog, smoke, rain, snow and night etc.
- Starlight illumination
- Gyroscope stabilization for stable picture
- Vari-focal laser: 800m (2624.7ft) distance, proportional to optical zoom of camera module
- 2D/3D DNR (Digital Noise Reduction) Smart linkage: thermal channel support fire detection, optical channel can link to the fire position and zoom in, more accurate to judge fire situation
- Smart intrusion prevention based on deep learning algorithm: cross line, enter area, leave area, intrusion, support smart tracking

TIC6831ER-F50-  
4X38P THERMAL

SORĞU  
ƏSASINDA



- 4MP Thermal & Optical Dual-spectrum Starlight Intelligent PTZ Dome Camera
- 1/1.8" 4MP progressive scan CMOS
- Up to 2688\*1520 resolution, 60fps;
- 384\*288 vanadium oxide uncooled focal plane arrays
- Ultra 265, H.265
- Smart IR, up to 150m IR distance
- Support Wiper
- 120dB True WDR
- 2D/3D DNR, ROI, ONVIF
- AC/DC24V, Wide voltage range of  $\pm 25\%$
- IP66
- PoE (IEEE 802.3bt)

# PTZ IP CAMERA



KIT/NVR301-04LS3-W/4\*2122LB-ABF28WK-G

850AZN

- 5MP LightHunter Active Deterrence Mini PTZ Camera
- High quality image with 5MP, 1/2.7"CMOS sensor
- Ultra 265, H.265, H.264, MJPEG
- Smart intrusion prevention, support false alarm filtering, include Cross Line, Intrusion, Enter Area, Leave Area detection
- People Counting, support people flow counting and crowd density monitoring, suitable for different statistical scenarios
- LightHunter technology ensures ultra-high image quality in low illumination environment
- Up to 120 dB Optical WDR (Wide Dynamic Range)
- Built-in Mic & Speaker
- Smart IR, Up to 50 m (164 ft) IR distance and 10m (33 ft) warm light distance
- Micro SD, up to 256GB
- IP66 protection
- DC12V or PoE (IEEE 802.3af) power supply




KIT/NVR301-04LS3-W/4\*IPC322LB-ABF28WK-G

901AZN

- NVR301-04LS3-W
- Embedded WiFi Module with high-performance and high stability
- Support CCMP encryption and WPA2-PSK authentication, Support IP cameras with WiFi in access
- Support Ultra 265/H.265/H.264 video formats
- 4-channel input
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T ) and RTSP protocols
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA synchronous outputs provided
- Up to 1080P resolution recording
- 1 SATA HDD, Up to 6TB for each HDD
- Support cloud upgrade
- IPC322LB-ABF28WK-G
- High quality image with 2MP, 1/2.9"CMOS sensor
- 2MP (1920\*1080)@30/25fps; 720P (1280\*720)@30/25fps
- Ultra 265, H.265, H.264, MJPEG
- Built-in Mic
- Smart IR, up to 30m (98ft) IR distance
- Supports 128 G Micro SD card
- IK10 vandal resistant

HC121@TS8CR-Z

SORĞU  
ƏSASINDA

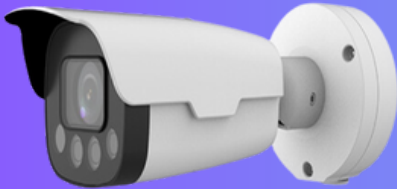

- 2MP ANPR Bullet Camera
- \* Starlight optical sensor and integrated IR illuminator produce clear images in night environments and reduce light pollution.
- \* 4 LED IR illumination beads provide up to 50m illumination.
- \* 2MP industrial-grade sensor delivers 1920 x 1080 images
- \* Motorized zoom lens enables flexible focal length adjustment and easy installation.
- \* Built-in vehicle&license plate recognition algorithm can recognize standard license plates of multiple countries.
- \* Supports capturing vehicle head only.
- \* Supports allowlist and blocklist configuration.
- \* Supports vehicle access control when connected to a barrier.
- \* Supports Micro SD cards of up to 128GB.
- \* Supports Automatic Network Replenishment (ANR), the camera can automatically store video to its SD card in case of network disconnection.
- \* Supports audio acquisition and intercom.
- \* Quraşdırılmış avtomobilin və nömrə nişanının tanınması alqoritmi



# SMART POE SWITCH

## NSW2010-6T-POE-IN

108.80AZN



- Multiple working modes to address your business needs: Normal, Secure and Surveillance
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable Max capacity: 65W
- Max capacity for single port: 30W

## NSW2010-10T-POE-IN

170 AZN



- Multiple working modes to address your business needs: Normal, Secure and Surveillance
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable Max capacity: 120W
- Max capacity for single port: 30W

## NSW2020-16T1G1GC-POE-IN

595 AZN



- Multiple working modes to address your business needs: Normal, Secure and Surveillance
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable Max capacity: 225W
- Max capacity for single port: 30W

## NSW2020-24T1G1GC-POE-IN

714 AZN



- Multiple working modes to address your business needs: Default(Normal mode), VLAN(Secure mode), EXTEND(Surveillance mode)
- Support port traffic control
- Support for secure mode, all downlink ports can communicate only with uplink ports
- Up to 250m transmission distance on surveillance mode
- Support buffer optimization
- All metal housing, safe and reliable Max capacity: 370W
- Max capacity for single port: 30W

# SMART POE SWITCH

**NSW5110-24GT4GP-IN**  
**ETHERNET SWITCHES**

901 AZN



- Support RJ45 Auto-MDI/MDIX; Aggregation Switch
- 
- Flow Control for Full Duplex operation and back pressure for Half Duplex Operation;
- Support Energy-Efficient Ethernet (EEE) function (IEEE802.3az);
- Supports a complete lineup of L2 features, including 802.1Q tag VLAN, Port Mirroring, STP/RSTP/MSTP, Link Aggregation Control Protocol and 802.3x Flow Control function;
- Web, CLI (Console Port, Telnet, SSH), SNMP and RMON bring abundant management policies;

# SMART POE SWITCH

## MW3222-L 22" LED FHD MONITOR

306 AZN



- True color display
- Resolution is up to at 1920×1080
- Wide viewing angle:170°(H)/ 160°(V)
- Specific menu design, which is simple to operate
- Support7\*24working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language
- Built-in 3D COMB filter and 3D Noise Reduction
- 5ms response time for no motion blur, judder or ghosting
- High fidelity digital processing for a brilliant and vivid video
- Professional thermal design to extend equipment lifespan

## MW3224-V 24" LED FHD MONITOR

323 AZN



- True color display and perfect color reproduction
- Wide viewing angle:178°(H)/ 178°(V)
- No color shift from any view angle
- Specific menu design, which is simple to operate
- Support7\*24working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- High fidelity digita processing for a brilliant and vivid video
- Professiona therma design to extend equipment lifespan
- Screen can reduce blue light, protect eyes
- Without ripple,use smooth dimming with DC to eliminate screen flicker
- Three sides super slim design, min width can be 2.8mm
- High light transmittance, uniform brightness, rich color, wide color gamut

## MW3232-V-K 32" LED FHD MONITOR

578 AZN



- Plastic casing, even lighter.
- Resolution 1920 × 1080 Input HDMI × 1, VGA × 1, Audio × 1
- Shield design effectively prevents electromagnetic radiation.
- New color management module delivers true-to-life colors.
- Ultra-narrow bezel, ultra-slim depth, light-weight and elegant.
- Wide 178° viewing angles allow viewing from almost any direction.
- Automatic detection of signal cable connection.
- Stable structural design, highly durable.
- Industrial-grade power module ensures stable and reliable operation, low power consumption, and long lifetime.
- Easy pedestal assembly/disassembly. Flexible wall mount and pedestal mount, saving space.
- The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of

## MW3243-F-V 43" LED UHD MONITOR

816 AZN



- 4K UHD display.
- Stable structure design, highly durable, ultra-narrow bezel, ultra-slim depth, light-weight and elegant.
- Industrial-grade panel, 24/7 continuous operation.
- The automatic color and image enhancing engine effectively improves the contrast, details, and edges of the images and to render optimum colors.
- Wide 178° viewing angles allow viewing from almost any direction.
- Silent operation, offering a quiet working environment.
- VESA standard mount enables easy installation.
- Flexible wall mount and stand mount, saving space.
- The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI

**MW3255-F-V**  
**55" LED UHD MONITOR**

1326AZN



- 4K UHD display.
- Stable structure design, highly durable, ultra-narrow bezel, ultra-slim depth, lightweight and elegant.
- Industrial-grade panel, 24/7 continuous operation.
- The automatic color and image enhancing engine effectively improves the contrast, details, and edges of the images and to render optimum colors.
- Wide 178° viewing angles allow viewing from almost any direction.
- Silent operation, offering a quiet working environment.
- VESA standard mount enables easy installation.
- Flexible wall mount and stand mount, saving space.
- The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI