




★ **XB-D66T**

Product Feature

- Support various barcodes such as WeChat and Alipay
- New decoding chip for interpreting various 1D and 2D barcodes
- Support Chinese direct transmission of QR code
- The USB base is plug-and-play, click the button on the base to pair
- Wire life more durable

Product Size

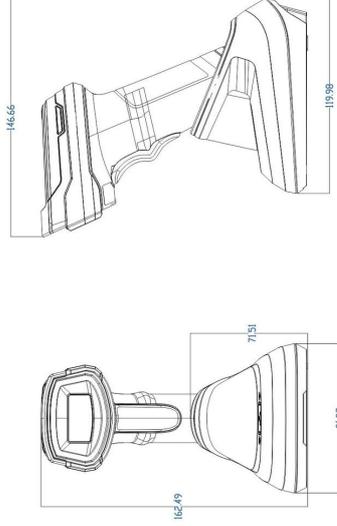

Specification

Performance Parameters

Light Sources: (Aimer)RED color LED, (Illumination)White color LED
 Supported Symbolologies: **1D:** Codabar, Code39, Code32Pharmaceutical (PARAF), Interleaved 2 of 5, NEC 2 of 5, Code 93, Matrix 2 of 5, Straight 2 of 5 Industrial, Straight 2 of 5 IATA, Code 11, Code128, GS1-128, UPC-A, UPC-E, EAN/JAN-8, EAN/JAN-13, MSI, GS1 DataBar Omnidirectional, GS1 DataBarLimited, GS1 DataBar Expanded, China Post(Hong Kong 2 of 5), Korea Post.
2D: Codeblock A, Codeblock F, PDF417, Micro PDF417, GS1 Composite Codes, QR Code, Data Matrix, MaxiCode, Aztec, HANXIN.

Scanning Principle: Image CMOS

Resolution: 640*480

Print Contrast: 20%

Scan Angle: Yaw±65°, Rotation 360°, Pitch±65°

Depth of scan field: Code39(5mil): 7-16cm, Code39(13mil): 7-32cm

QR code (15mil): 3-18cm, Code128(20mil): 6-35cm

Error Rate: 1/5million

Interface: USB-HID, USB-COM

Transmission distance: 100M(Open Yard)

Communication mode: Pairing dedicated base: 2.4G

Storage mode: Offline storage mode: Paired mobile Bluetooth devices: Dual-mode Bluetooth the data is automatically stored. Storage capacity is 200K characters
 Inventory storage mode: The scanner can enter inventory mode, with a storage capacity of 200K characters

Pairing Mode: One to One: One Scanner Pairs One base,
 One scanner paired with a Bluetooth mobile device.

Receiving end: Dedicated Bluetooth U disk receiver, Android/IOS mobile device

Environmental Parameters

Operating Temperature: -20°C~50°C

Storage Temperature: -40°C~70°C

Ambient lighting: 0~100000LUX

Relative Humidity: 5% ~95% RH(Non-condensing)

Shock Resistance: Withstands multiple times 1.5 meters drops to concrete

Physical Parameters

Dimensions: 83.5mm*65.7mm*174.8mm

Material: ABS+PC

Cable Length: 1M

Electrical Parameters

Voltage: DC5V±5%

Operating Current: Standby Current ≥35 mA. WorkingCurrent ≥300mA

Standby Current: 0mA(Standby is to cut off battery power) Lithium battery: 2200mAh

Charging Time: 3h Charging Mode: Typec charging cable, plug in and charge directly

Battery Working Time: 7h

Application



Retail



Express



Industry